



This Tutorial is to Assist you to re-tune your HUMAX satellite receiver after the recent frequency changes to the Optus C1 Aurora network.

1. Press MENU button
2. Highlight INSTALLATION and press OK

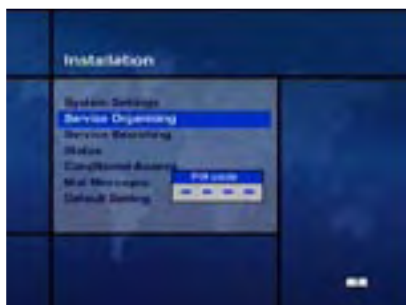

- You are now in the INSTALLATION menu
3. Highlight SERVICE ORGANISING and press OK
 4. You will be asked for a PIN Code (Default is 0000) consult customer or installer if PIN has been changed

5. Highlight ORGANISE NETWORKS and press OK The List on the left of screen shows you the NETWORKS, the list on the right shows you the SERVICES in that network.
6. Select the "OPT" network then press the RED button to highlight then press OK. (This will delete the Network)

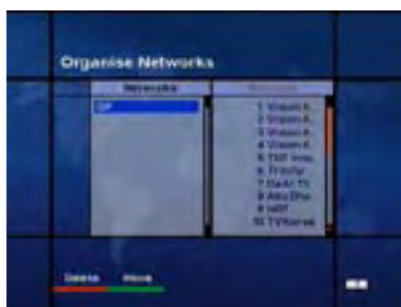

7. Press the EXIT button "twice" on the remote and this will bring you back to the INSTALLATION menu.
9. Highlight SERVICE SEARCHING and press OK

10. Highlight MANUAL SEARCH and press OK
11. Insert the following details:

Frequency 12407
 Polarisation Vertical
 Symbol Rate 30000
 FEC 2/3
 Network Search YES
 AutoSkip NO
 BAT Search NO



12. NOW BOTH yellow bars on the bottom of the screen will show some BLUE indicators inside them**. Press "OK" to search.
13. ***IMPORTANT press "OK" after successful search to save the Optus Aurora channel list.

Now push the EXIT button "three times to exit the menu system"

**If BOTH yellow bars do not show some BLUE indicators you may need to call Your SATELLITE INSTALLER.

ALL THE ABOVE TUNING INSTRUCTIONS ARE AVAILABLE IN THE RECEIVER MANUAL